

Product Data Sheet

Key Features & Benefits:

- Class leading stability
- Low zero drift
- Highly sensitive
- Highly selective for acid gases

Technical Specifications

MEASUREMENT

Operating Principle	3-electrode electrochemical
Measurement Range	0-10 ppm
Filter	None
Sensitivity	300 ± 100 nA/ppm (negative signal)
Response Time (T₉₀)	< 90 s <small>calculated from 3 min exposure time</small>
Baseline Offset (clean air)	< ±30 nA
Repeatability	< 10% of full scale
Linearity	< 10% of full scale

ELECTRICAL

Recommended Load Resistor	None
Bias Voltage	Not required
Resolution	< 150 ppb
<small>(Electronics dependent)</small>	

MECHANICAL

Housing Material	ABS
Weight	2.3 g (Mini) 4.6 g (4 Series) 6.9 g (7 Series)
Recommended Orientation	sensor front pointing downwards or sideways

ENVIRONMENTAL

Typical Applications	TLV-monitoring, leakage detection, Portable & fixed point applications
Operating Temperature Range	-20°C to +40°C
Operating Pressure Range	Atmospheric ± 10%
Operating Humidity Range	15% to 90% r.h. non-condensing


INTRINSIC SAFETY DATA

Maximum at 10ppm	0.4 µA
Maximum o/c Voltage	< 500 mV
Maximum s/c Current	500 µA

LIFETIME

Long Term Output Drift	< 10% per 6 months
Expected Operating Life	> 18 months in air
Storage Life	8 weeks in sealed container
Standard Warranty	12 months from date of despatch

Available in:

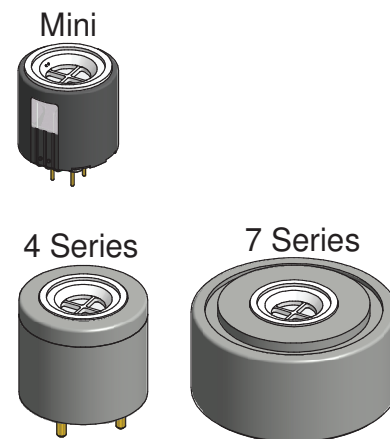

Part Numbers

HF	Part Number
Mini	1336-932-30009
4-Series	1336-932-30049
7-Series	1336-932-30079
Transmitter	1336-932-30659

IMPORTANT NOTE:

Connection should be made via PCB sockets only. Soldering to pins will render your warranty void.

All performance data is based on conditions at 20°C, 50% r.h. and ambient pressure using manufacturer recommended circuitry. For information on sensor performance under other conditions contact the manufacturer.

Product Data Sheet

Poisoning

Sensor cells are designed for operation in a wide range of environments and harsh conditions. However, it is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments, and operation.

When using sensors with printed circuit boards (PCBs), degreasing agents should be used before the sensor is fitted. Do not glue directly on or near the cells as the solvent may cause crazing of the plastic.

SAFETY NOTE

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement the manufacturer reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of the manufacturer, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.

Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time.