

Product Data Sheet

Chlorine

Cl₂ 3E 10

Product Data Sheet

CI2 3E 10

FEATURES

Amperometric 3 electrode sensor cell
Low susceptibility to abrupt changes of humidity
Low interference to SO₂
High poison resistance

TYPICAL APPLICATIONS

Portable & fixed point applications
TLV monitoring
Water treatment plants, swimming pools, chemical industry

PART NUMBER INFORMATION

MINI	0436-032-30009
4 series adaptation	0436-032-30049
7 series adaptation	0436-032-30079

The manufacturer deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which the manufacturer assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Product Data Sheet

CI2 3E 10

TECHNICAL SPECIFICATIONS


Measuring Range		0-10 ppm; typically: 0–5 ppm
Sensitivity Range		450 nA/ppm \pm 200 nA/ppm (negative current)
Zero Current at 20°C		< \pm 20 nA
Resolution at 20°C		< 0.05 ppm
Bias Potential	0 mV	
Linearity		< 5% full scale
Response Time at 20°C		
t50		< 30 s calculated from 2 min. exposure time
t90		< 60 s calculated from 2 min. exposure time
Long Term Sensitivity Drift		< 10% per 6 months
Operation Conditions		
Temperature Range		-20°C to + 40°C
Humidity Range		15–90% r.H., non–condensing
Effect of Humidity		no effect on zero current
Sensor Life Expectancy		> 24 months in air
Warranty		12 months

The manufacturer deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which the manufacturer assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Product Data Sheet

CI2 3E 10

OUTPUT vs. TEMPERATURE:

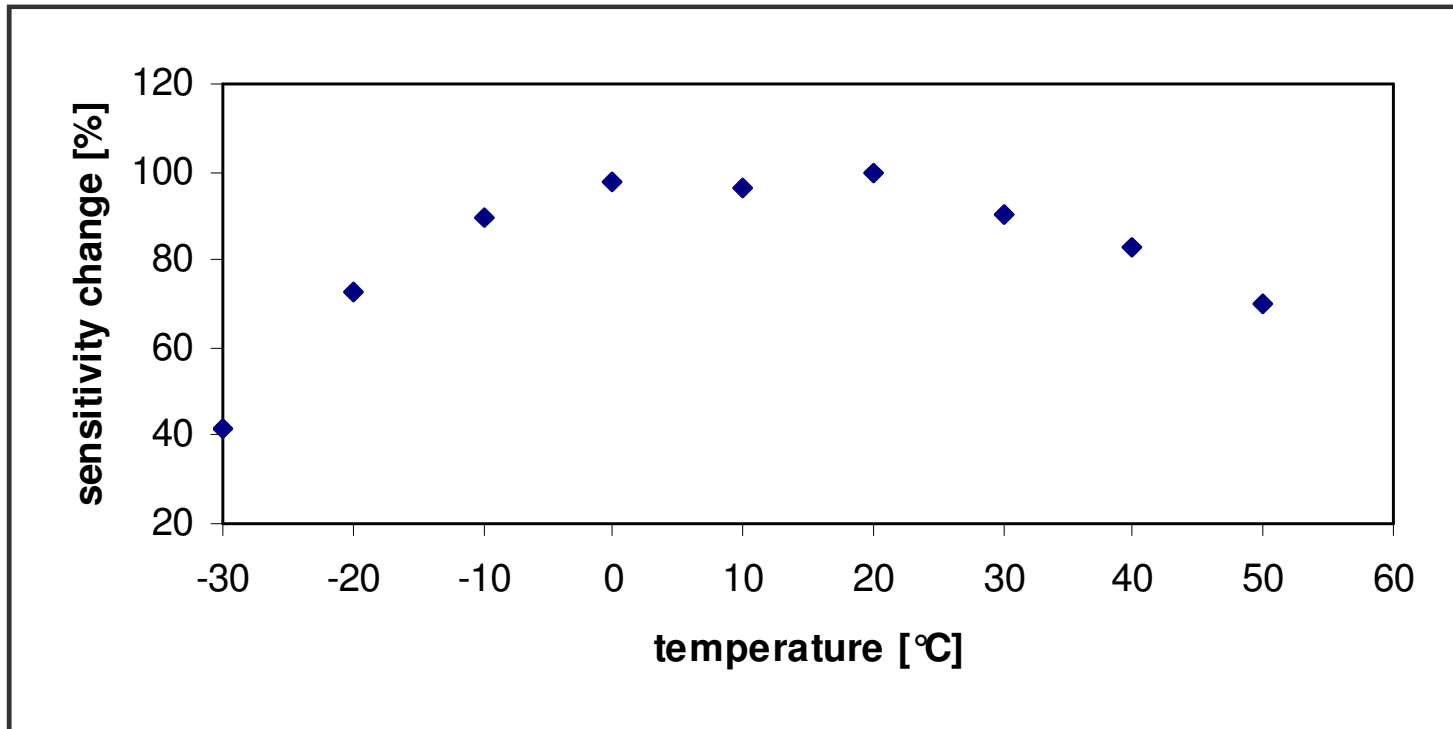


The manufacturer deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which the manufacturer assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Product Data Sheet

CI2 3E 10

ZERO READING vs. TEMPERATURE:

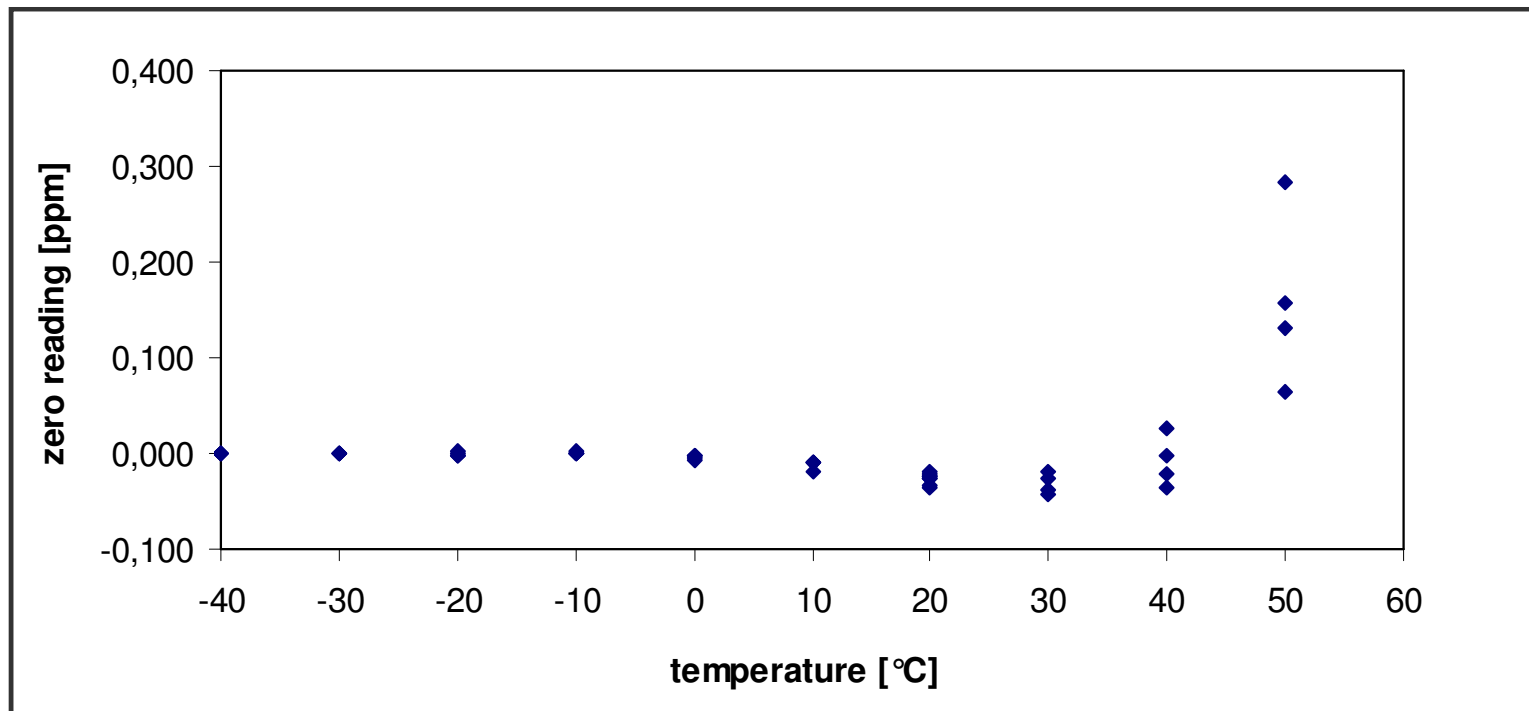

The manufacturer deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which the manufacturer assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Product Data Sheet

CI2 3E 10

CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Ammonia	100 ppm	0
Bromine	1 ppm	1.0 (theoretical)
Carbon Dioxide	1 %	0
Carbon Monoxide	100 ppm	0
Chlorine Dioxide	2.4 ppm	0.55
Hydrogen	3000 ppm	0
Hydrogen Sulfide	20 ppm	0.1
Nitrogen Dioxide	10 ppm	4.5
Ozone	0.25 ppm	0.11
Sulfur Dioxide	20 ppm	0

Notes:

1. Interference factors may differ from sensor to sensor and with life time. It is not advisable to calibrate with interference gases.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

The manufacturer deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which the manufacturer assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Product Data Sheet

Safety Note

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Attention

Use of this range of sensors requires complete understanding of the instructions. Before using this range of sensors please carefully read 'Application Notes'.

For further assistance on sensor selection and use, please contact a member of the Technical Sales team.

The manufacturer deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which the manufacturer assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.