

H2S-5000F SENSOR – LONG LIFE HYDROGEN SULPHIDE SENSOR



FEATURES

- Mini size ideal for portable, fixed, low power and battery applications
- High 5000ppm H2S range
- Long lifetime technology of 15 years
- Zero power consumption
- High sensitivity, fast response
- Selective detection, high precision
- Wide temperature range with high temperature capability up to 125°C




TYPICAL APPLICATIONS

- Industrial Detection & Safety Monitoring
- Portable and fixed instruments
- Oil & gas monitoring in refineries, drilling operations and pipelines
- Wastewater treatment
- Chemical manufacturing
- Mining
- Biogas monitoring of landfill & digesters
- Energy engineering
- Li battery factories & warehouses
- Electric vehicles
- Process Monitoring
- Energy Engineering



H2S-5000F SENSOR – LONG LIFE HYDROGEN SULPHIDE SENSOR

DIMENSIONS

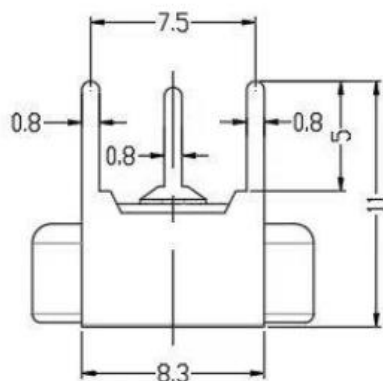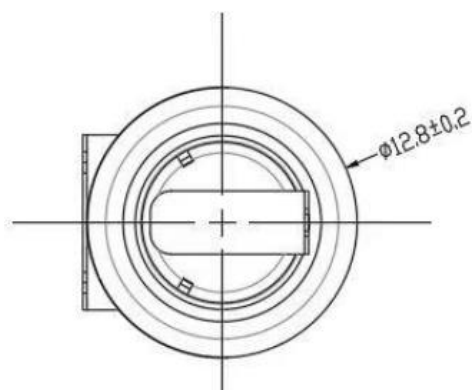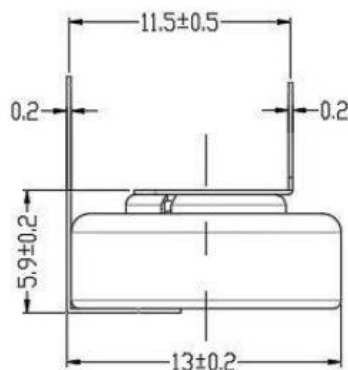

SPECIFICATION

Measuring Principle:	Mini fuel cell, 3-electrode sensor
Detectable Gases:	Hydrogen Sulphide H ₂ S
Standard Range:	0 – 5000ppm H ₂ S
Maximum Over-Range:	6000ppm
Optional Ranges on request:	0-2ppm, 0-100ppm H ₂ S
Sensitivity:	0.6 ± 0.2 nA/ppm
Response Time (T₉₀):	< 90 seconds
Repeatability:	3 % typically
Lower Detectable Limit (LDL):	20 ppm
Warm-up time:	Less than 60 seconds
Linearity:	Linear
Expected Operating Life:	15 years in air
Operating Temperature Range:	-40°C to +125°C
Humidity Range (non-condensing):	10 – 90% RH
Pressure Range:	1 atm +/- 10%
Weight:	3 g
Warranty Period:	12 months from date of manufacture
Part Number:	2112B6005000

All dimensions are in millimetres mm.

All tolerances are +/- 0.15mm.

Note: PCB sockets are recommended for the sensor pin connection. Soldering or using glue with the sensor should be avoided and will invalidate warranty.

All performance specifications are based upon the following environment conditions: +20°C, 50% relative humidity and 1 atm (1013 mBar or ambient pressure).



H2S-5000F SENSOR – LONG LIFE HYDROGEN SULPHIDE SENSOR

Notes: PCB sockets are recommended for the sensor pin connection. Soldering or using glue with the sensor should be avoided and will invalidate warranty. Socket connector information available on request. Sensors are designed to operate in a wide range of harsh environments and conditions. However, it is important to avoid exposure to high concentrations of solvent during storage, fitting into instrumentation and operation. When using sensors on PCBs, degreasing agents should be used prior to the sensor being fitted.

By the nature of the technology used, any sensor can potentially fail to meet specification without warning. Euro-Gas makes every effort to ensure reliability of all sensors but where life safety is a performance requirement of the product and, where practical, Euro-Gas recommends that all gas sensors and instruments using sensors are checked for response to gas before use. The data contained in this document is believed to be accurate and reliable. The data given is for guidance only. Euro-Gas Management Services Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this datasheet or the information contained in it. Customers should test the sensors under their own conditions to ensure that the sensors are suitable for their own requirements and in accordance with the plans and circumstances of the specific project and any standards/regulations pertaining to the country in which the sensors will be utilised. Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time. This datasheet is not intended to form the basis of a contract and in the interest of product improvement, Euro-Gas reserves the right to alter design features and specifications without notice. 2508

