

## 1. PERFORMANCE


- 1) Measuring range : 10-400 ppm
- Number of pump strokes : 1 (100mℓ)
- 2) Sampling time : 1.5 minutes/1 pump stroke
- 3) Detectable limit : 3 ppm
- 4) Shelf life : 1 year
- 5) Operating temperature : 10 ~ 40 °C
- 6) Temperature compensation : Necessary (See "TEMPERATURE CORRECTION TABLE")
- 7) Reading : Direct reading from the scale calibrated by 1 pump stroke
- 8) Colour change : Pale yellow → Pale blue (The top of discoloured layer is Brown, but read at the top of Pale blue.)

## 2. RELATIVE STANDARD DEVIATION

RSD-low : 10% RSD-mid. : 5% RSD-high : 5%

## 3. CHEMICAL REACTION

Chromium oxide is reduced.



## 4. CALIBRATION OF THE TUBE

GAS CHROMATOGRAPHY

## 5. INTERFERENCE AND CROSS SENSITIVITY

Substance	Interference	Coexistence
Esters	Similar stain is produced.	Higher readings are given.
Alcohols	∕	∕
Ketones	∕	∕
Aromatic hydrocarbons FIG.1	∕	∕

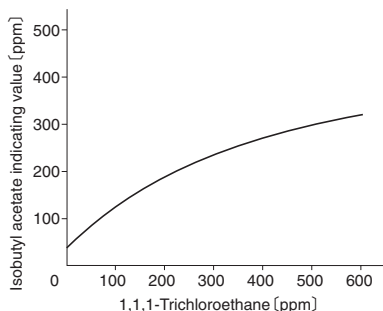


FIG.1 Influence of 1,1,1-Trichloroethane

TEMPERATURE CORRECTION TABLE

Tube Readings (ppm)	Corrected Concentration (ppm)					
	10 °C (50 °F)	15 °C (59 °F)	20 °C (68 °F)	25 °C (77 °F)	30 °C (86 °F)	40 °C (104 °F)
400	—	—	400	285	240	210
300	—	—	300	225	190	170
200	—	275	200	165	140	130
150	—	195	150	125	110	103
100	—	120	100	90	80	75
50	70	55	50	45	40	40
30	40	35	30	25	20	20
20	25	20	20	20	15	15
10	15	10	10	10	5	5