

C2 LOW POWER CO2 SENSOR

DESCRIPTION – WIDE RANGE

The C2 is a high sensitivity Carbon Dioxide (CO₂) sensor offering ultra low power (3.5mW).



The sensor reaches full accuracy just two seconds after powering-up. Combination of very low power and fast warm-up make it ideal for use in portable instruments, especially battery powered applications - hand held devices, wireless systems – where low duty cycle is important to maximise battery life. Extremely low power consumption can be achieved by powering down the sensor between measurements.



C2 Infrared Carbon Dioxide CO₂ SENSOR. Part no. 2112BC2

The illustration below shows the battery life powering one C2 sensor from 3 x AAA batteries


C2 warm-up is only 2 seconds

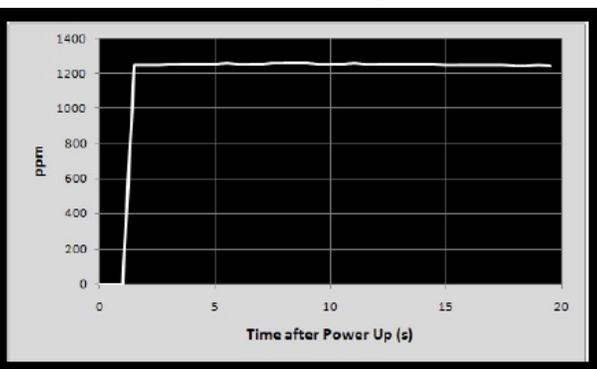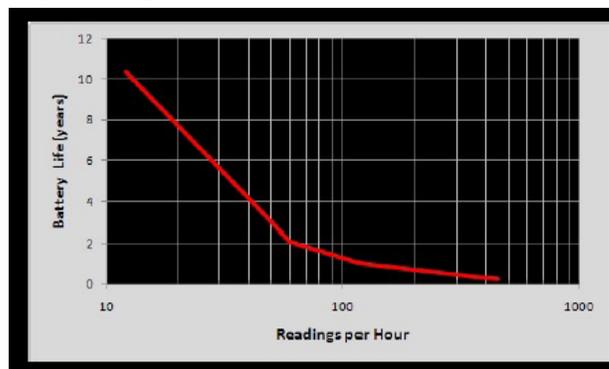

This compact infrared sensor is ideally suited for battery operation and portable instruments and for low concentration markets, including Heating, Ventilation and Air Conditioning (HVAC) and Indoor Air Quality (IAQ). The standard ranges offered are 0-5%, 0-20%, 0-65% and 0-100% volume. Optional temperature and humidity sensing is also available with this sensor.

FEATURES

- Ultra-low Power 3.5mW
- 2 readings per second
- Measurement ranges from 5% to 100%
- 3.3V supply.
- Peak current only 33mA.
- Optional Temperature and Humidity Output

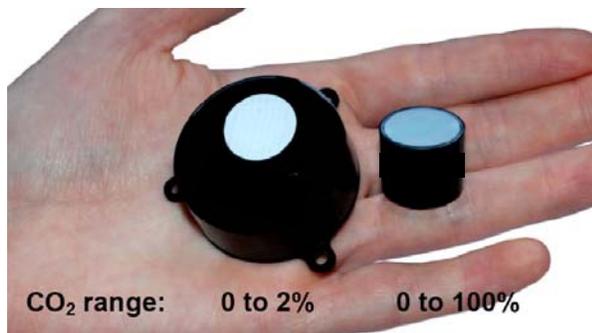

C2 LOW POWER CO2 SENSOR

SPECIFICATIONS

Operating Principle:	Non-dispersive infrared (NDIR) absorption. Patented gold-plated optics. Patented solid-state source and detector
Gas Detected:	Carbon Dioxide CO ₂
Sample method:	Diffusion
Measurement Ranges:	Standard: 0 – 5 % volume Optional: 0 – 20 % volume Optional: 0 – 60 % volume Optional: 0 – 100 % volume Other ranges available on request
Response Time:	4 seconds to 2 minutes (user configurable filter response) Reading refreshed twice per second (user configurable filter response)
Warm-up Time:	< 10 seconds
Resolution:	1ppm
Accuracy:	+/- 70ppm +/-5% of reading (measurement at STP)
Non Linearity:	<1% of FS
Operating Temperature Range:	0°C to 50°C (standard); -25°C to +55°C (extended range)
Humidity Range:	0 - 95% RH, non-condensing
Pressure Dependence:	0.13% of reading per mm Hg
Operating Pressure Range:	950 mbar – 10 bar (external pressure calibration required to eliminate pressure dependence)
Expected Operating Life:	5 years in normal use from date of manufacture

Electrical/Mechanical Specifications

Power Input:	3.2 to 5V (3.3V recommended) Peak current 33mA. Average current <1.5mA
Power Consumption:	3.5mW
Wiring Connections:	2 x 5 0.1" header

Power measurements for standard CO₂ sensor with 2 readings per second. If using the temperature and humidity option, temperature and humidity measurements will increase the power consumption.





C2 LOW POWER CO2 SENSOR

Physical Specifications

Storage Conditions:	-30°C to +70°C
Weight:	approx. 18g
Warranty period:	6 months from date of despatch
Part Number:	2112BC2

CONNECTIONS

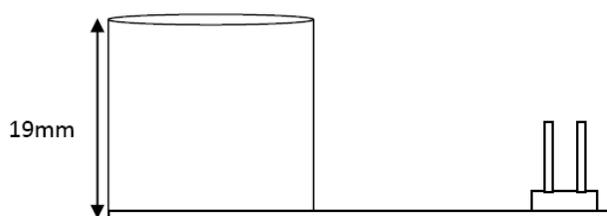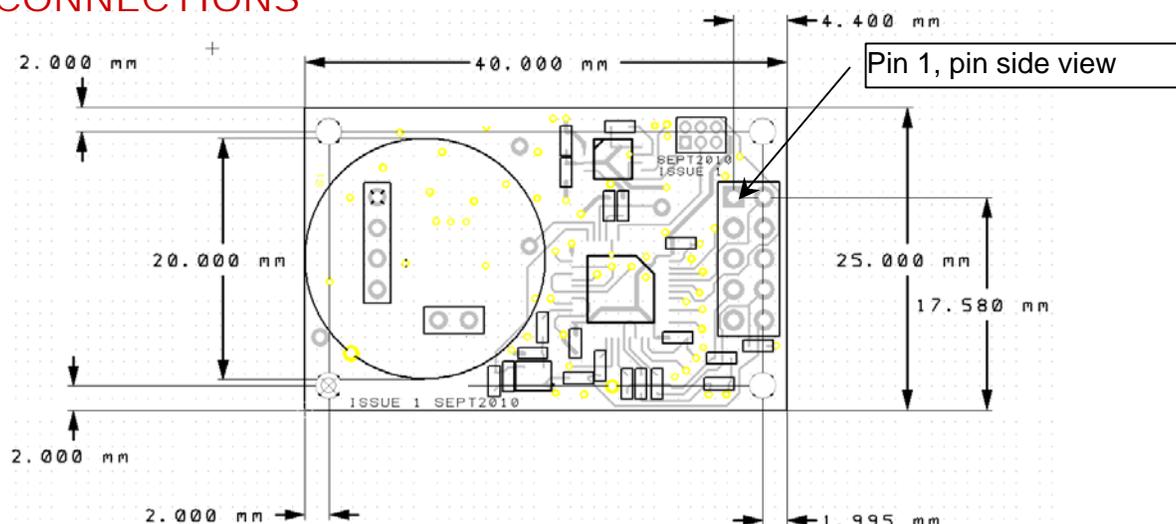

Function	Pin #	Pin #	Function
0V	1	2	N/C
+3.3V	3	4	0V
Sensor Rx (in)	5	6	0V
Sensor Tx (out)	7	8	Zero N
Analogue O/P	9	10	Zero Air

Wiring Connections: 2 x 5 0.1" header. Pin 1 is identified on the dimensional drawing above.

Pin 2 should not be connected. Pins 4 and 6 do not require connection and are internally connected to GND.

The zeroing options are for hardware zeroing (both active low). These functions can also be implemented by sending a serial command (recommended).


Typical connections for digital interface are GND, 3.3V, Rx and Tx. Note that the V_h for the serial Tx line will be 3V regardless of the supply voltage.

The analogue (voltage) output is available only when specified. Otherwise, N/C.



C2 LOW POWER CO2 SENSOR

DIMENSIONS WITH FLOW HOUSING ADAPTER OPTION

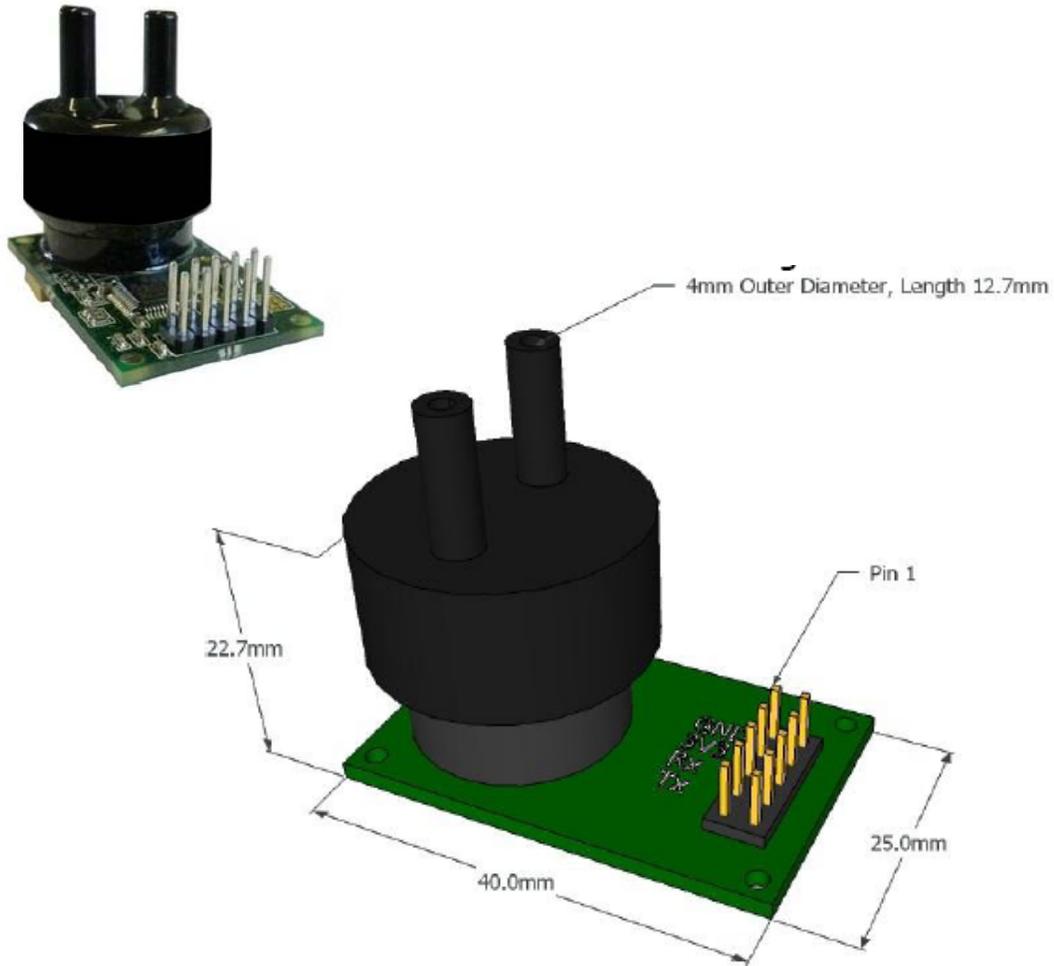

Infrared C2 Carbon Dioxide CO2 sensor
shown with optional fitted flow housing adapter

Part nos. 2112BC2 + 2112BC12-H

EURO-GAS MANAGEMENT SERVICES LTD, CHURSTON HOUSE,
BASCOMBE ROAD, CHURSTON FERRERS, DEVON, TQ5 0JJ, UK

☎: +44 (0)1803 844414 Fax: +44 (0)1803 844224
euro-gas@btconnect.com www.euro-gasman.com



EURO-GAS
MANAGEMENT SERVICES LTD

C2 LOW POWER CO2 SENSOR

TEMPERATURE & HUMIDITY MEASUREMENT

An optional Temperature and Humidity sensor is available with the C2 CO₂ gas sensor. This is only available as digital output.

Sensing Method

Humidity: Capacitive

Temperature: Bandgap

Measurement Range

Temperature: -25°C to +55°C

Humidity: 0 to 95% RH

Resolution

Temperature: 0.08 °C

Humidity: 0.08% RH

Repeatability

+/- 0.1 °C

+/- 0.1 % RH

Absolute Accuracy

+/- 1 °C 0°C to 55°C.

+/- 3% RH 20°C to 55°C.

+/- 2°C over the full temperature range

+/- 5% RH over the full temperature range

Temperature and humidity derived from SHT21 chip. Data sheet available on request for full details.

The data contained in this document is believed to be accurate and reliable. The data given is for guidance only. Euro-Gas Management Services Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this datasheet or the information contained in it. Customers should test the sensors under their own conditions to ensure that the sensors are suitable for their own requirements and in accordance with the plans and circumstances of the specific project and any standards/regulations pertaining to the country in which the sensors will be utilised. This datasheet is not intended to form the basis of a contract and in the interest of product improvement, Euro-Gas reserves the right to alter design features and specifications without notice.

08/13

