
# MINI O2 OXYGEN SENSOR 0-30% VOL O2



#### **Outline Dimensions**

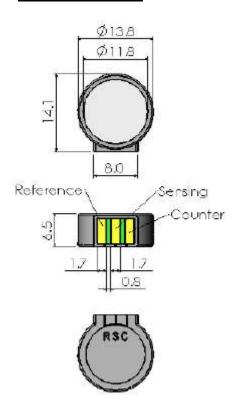

All dimensions are in millimeters. All tolerances are ±0.2mm.

Note: PCB sockets are recommended for the sensor pin connection. Soldering to the sensor should be avoided and will invalidate warranty.

All performance specifications are based upon the following environment conditions: +20°C, 50% relative humidity and 1 atm (1013 mBar or ambient pressure).

### **SPECIFICATION - MINI SERIES**

Operating Principle: Electrochemical, 3-electrode cell

Gas Detected: Oxygen O2

Measurement Range: 0 - 30% Volume O2

Maximum Overload: 90% Volume O2

**Resolution:** 0.1% Volume O2

**Expected Operating Life:** 2 years in air

Temperature Range: -20°C to +50°C

**Humidity Range (non-condensing):** 15 – 90% RH

Response Time (T90):  $\leq$  15 seconds

Long Term Sensitivity Drift: < 2% signal per 3 months

Linearity at Standard Range: Linear

**Sensitivity:**  $85 + /- 20 \mu A$  in air

**Baseline (20°C):** < 10 μa in Nitrogen

Pressure range: 80 to 120 kPa

Bias Potential: - 600 mV

Warranty Period: 12 months from date of despatch

**Storage Life:** 6 months in original sealed container

**Storage Temperature:** 0°C to +20°C

Weight (approx): 1 g

Orientation Sensitivity: None

**Part Number:** 2112B0231S00

CLE-0231-S00




## MINI O2 OXYGEN SENSOR 0-30% VOL O2

#### CROSS SENSITIVITY DATA

Gas	Concentration (ppm)	Output Signal (% O <sub>2</sub> equivalent)
Carbon Dioxide	2%	0
Hydrogen	1%	-2%

**Notes:** Calibration with cross-sensitivity gas is not recommended. The cross-sensitivity may fluctuate between +/- 30% and may differ from batch to batch and within the sensor's lifetime. The cross-sensitivities are including but not limited to the above gases. The sensor may also respond to other gases.

### **TEMPERATURE DEPENDENCE**

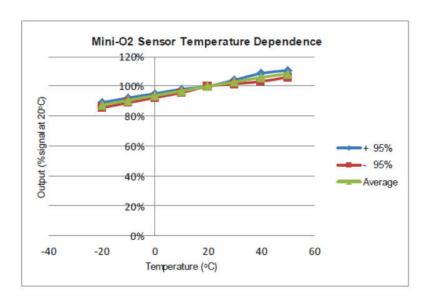

**Notes:** Sensors are designed to operate in a wide range of harsh environments and conditions. However, it is important to avoid exposure to high concentrations of solvent during storage, fitting into instrumentation and operation. When using sensors on PCBs, degreasing agents should be used prior to the sensor being fitted.

By the nature of the technology used, any sensor can potentially fail to meet specification without warning. Euro-Gas makes every effort to ensure reliability of all sensors but where life safety is a performance requirement of the product and, where practical, Euro-Gas recommends that all gas sensors and instruments using sensors are checked for response to gas before use.

The data contained in this document is believed to be accurate and reliable. The data given is for guidance only. Euro-Gas Management Services Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this datasheet or the information contained in it. Customers should test the sensors under their own conditions to ensure that the sensors are suitable for their own requirements and in accordance with the plans and circumstances of the specific project and any standards/regulations pertaining to the country in which the sensors will be utilised. Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time. This datasheet is not intended to form the basis of a contract and in the interest of product improvement, Euro-Gas reserves the right to alter design features and specifications without notice.

