

# Product Data Sheet

## Product Datasheet

### MICROceL HS Hydrogen Sulfide Sensor

#### Document Purpose

The purpose of this document is to present the performance specification of the MICROceL HS hydrogen sulfide gas sensor.

This document should be used in conjunction with the Operating Principles (OP08) and the Product Safety Datasheet (PSDS 5).

The data provided in this document are valid at 20°C, 50% RH and 1013 mBar for 3 months from the date of sensor manufacture.

Output signal can drift below the lower limit over time. For guidance on the safe use of the sensor, please refer to the Operating Principles (OP08).



## Product Data Sheet

### Key Features & Benefits:

- A robust hydrogen sulfide sensor suitable for portable life safety applications
- Extremely small size

### Technical Specifications

#### MEASUREMENT

|  |   |
|--|---|
| <b>Operating Principle</b>                     | 3-electrode electrochemical               |
| <b>Measurement Range</b>                       | 0-100 ppm H <sub>2</sub> S                |
| <b>Maximum Overload</b>                        | 1000 ppm H <sub>2</sub> S                 |
| <b>Filter</b>                                  | To remove TLV levels of interfering gases |
| <b>Sensitivity*</b>                            | 0.105 ± 0.025 µA/ppm                      |
| <b>T50 Response Time*</b>                      | <10 Seconds at 20°C                       |
| <b>Typical T90 Response Time</b>               | 25 to 40 seconds                          |
| <b>Baseline Offset (clean air)*</b>            | -2 to +1 ppm H <sub>2</sub> S equivalent  |
| <b>Maximum Zero Shift*</b><br>(+20°C to +40°C) | <0.2 ppm H <sub>2</sub> S equivalent      |
| <b>Linearity</b>                               | Linear up to 1000 ppm H <sub>2</sub> S    |

#### ELECTRICAL

|                                  |              |
|----------------------------------|--------------|
| <b>Recommended Load Resistor</b> | 10 Ω         |
| <b>Bias Voltage</b>              | Not Required |

#### MECHANICAL

|                          |       |
|--------------------------|-------|
| <b>Weight</b>            | 1.2 g |
| <b>Housing Material:</b> | ABS   |
| <b>Orientation</b>       | Any   |


#### ENVIRONMENTAL

|                                    |                            |
|------------------------------------|----------------------------|
| <b>Operating Temperature Range</b> | -40°C to +50°C             |
| <b>Recommended Storage Temp</b>    | 0°C to 20°C                |
| <b>Operating Pressure Range</b>    | Atmospheric ± 10%          |
| <b>Operating Humidity Range</b>    | 15 - 90% RH non-condensing |

#### LIFETIME

|                                |                                |
|--------------------------------|--------------------------------|
| <b>Expected Operating Life</b> | Two years in air               |
| <b>Long Term Output Drift</b>  | <5% signal loss per year       |
| <b>Storage Life</b>            | 6 months in original container |

### Product Dimensions

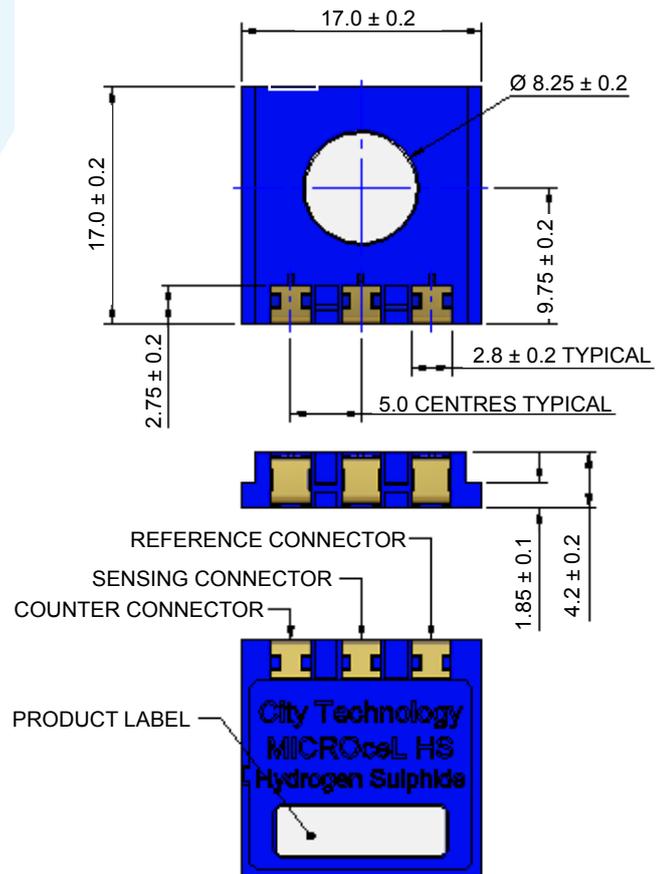

All dimensions in mm

#### IMPORTANT NOTE:

Connection should be made via PCB sockets only. Soldering to the pins will seriously damage your sensor and invalidate the warranty.

\* Specifications are valid at 20°C, 50% RH and 1013 mBar, using recommended circuitry. Performance characteristics outline the performance of sensors supplied within the first 3 months. Output signal can drift below the lower limit over time.

# Product Data Sheet

## Poisoning

Sensors are designed for operation in a wide range of environments and harsh conditions. However, it is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments and operation.

When using sensors with printed circuit boards (PCBs), degreasing agents should be used before the sensor is fitted. Do not glue directly on or near the sensor as the solvent may cause crazing of the plastic.

## Cross Sensitivity Table

Whilst sensors are designed to be highly specific to the gas they are intended to measure, they will still respond to some degree to various other gases. The table below is not exclusive and other gases not included in the table may still cause a sensor to react.

**IMPORTANT NOTE : The cross sensitivity data shown below does not form part of the product specification and is supplied for guidance only. Values quoted are based on tests conducted on a small number of sensors and any batch may show significant variation. For the most accurate measurements, an instrument should be calibrated using the gas under investigation.**

| Gas                               | Concentration Used (ppm) | MICROcelL HS (ppm H <sub>2</sub> S) |
|-----------------------------------|--------------------------|-------------------------------------|
| Carbon Monoxide, CO               | 15                       | 0.1                                 |
| Sulfur Dioxide, SO <sub>2</sub>   | 5                        | ~ 1                                 |
| Nitric Oxide, NO                  | 35                       | ~ 0.7                               |
| Hydrogen, H <sub>2</sub>          | 10000                    | < 10                                |
| Nitrogen Dioxide, NO <sub>2</sub> | 5                        | ~ -1                                |

### **SAFETY NOTE**

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardise the safety of people and property.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement, the manufacturer reserves the right to make product changes without notice. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of the manufacturer, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.