

# MICRO SS SENSOR 2000PPM SOLID STATE MULTI-GAS / VOC




## FEATURES

- Micro size ideal for portable, fixed, wireless and digital gas detection applications
- High sensitivity, fast response with low noise
- Solid state long lifetime technology of greater than 3 years without risk of leakage
- Low cost alternative to PID detection
- Extreme linear response
- Typical warm up time in seconds
- nA power consumption
- No or low zero line drift
- Better signal to noise ratio
- Wide temperature range with excellent sensitivity at low temperatures
- Low or no cross-interference with other environmental gases
- RoHS compliant

## TYPICAL APPLICATIONS

- Industrial safety & leakage detection
- VOC gas detection
- Gas manufacturing process monitoring
- Outdoor & indoor air quality
- Emission monitoring
- Sewage & Water Treatment
- Biogas
- Food Industry
- Medical & Healthcare
- Consumer markets

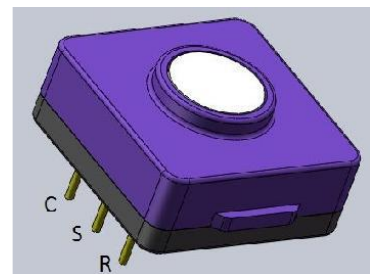

EURO-GAS MANAGEMENT SERVICES LTD, CHURSTON HOUSE,  
BASCOMBE ROAD, CHURSTON FERRERS, DEVON, TQ5 0JJ, UK

☎: +44 (0)1803 844414


sales@euro-gasman.com

www.euro-gasman.com



**EURO-GAS**  
MANAGEMENT SERVICES LTD

# MICRO SS SENSOR 2000PPM SOLID STATE MULTI-GAS / VOC

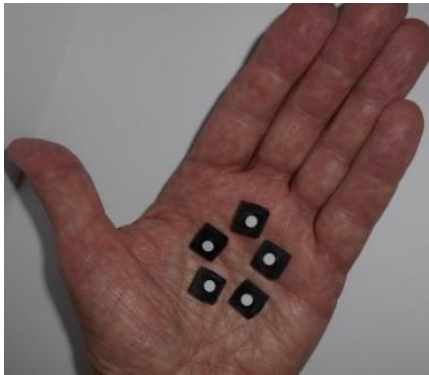

## SPECIFICATION

|   |   |
|---|---|
| <b>Measuring Principle:</b>               | Amperometric, 3-electrode sensor                          |
| <b>Detectable Gases:</b>                  | Multi-gases and Volatile Organic Compounds VOC            |
| <b>Standard Range:</b>                    | 0 – 2000 ppm  |
| <b>Optional Ranges on request:</b>        | 0-10ppm, 0-200ppm, 0-1000ppm                              |
| <b>Maximum Over-Range:</b>                | 5000 ppm  |
| <b>Sensitivity:</b>                       | 11 ± 4 nA/ppm calibrated to CO Carbon Monoxide equivalent |
| <b>Zero current at normal conditions:</b> | ± 100 nA  |
| <b>Response Time (T50):</b>               | < 10 seconds  |
| <b>Response Time (T90):</b>               | < 30 seconds  |
| <b>Sensor Warm-Up Time:</b>               | < 60 seconds  |
| <b>Repeatability:</b>                     | 1 %   |
| <b>Resolution (16 Bit ADC):</b>           | 0.1 ppm   |
| <b>Linearity:</b>                         | Linear  |
| <b>Long Term Sensitivity Drift:</b>       | < 5% / year   |
| <b>Expected Operating Life:</b>           | > 3 years   |

Notes: Long-term sensitivity drift may vary subject to storage conditions, environmental conditions and use in the application.

PCB sockets are recommended for the sensor pin connection. Soldering or using glue with the sensor should be avoided and will invalidate warranty.



**EURO-GAS MANAGEMENT SERVICES LTD, CHURSTON HOUSE,  
BASCOMBE ROAD, CHURSTON FERRERS, DEVON, TQ5 0JJ, UK**

☎: +44 (0)1803 844414

sales@euro-gasman.com



www.euro-gasman.com

**EURO-GAS**  
MANAGEMENT SERVICES LTD


# MICRO SS SENSOR 2000PPM SOLID STATE MULTI-GAS / VOC

## SPECIFICATION

|                                  |                                    |
|----------------------------------|------------------------------------|
| Operating Temperature Range:     | -40°C to +55°C                     |
| Humidity Range (non-condensing): | 15 – 95% RH                        |
| Pressure Range:                  | 800 to 1200 HPa                    |
| Bias Voltage:                    | 0 mV                               |
| Recommended load resistor:       | 100 Ω                              |
| Zero drift in clean air:         | < 1 ppm                            |
| Storage temperature:             | 0°C to +20°C (optimum 4°C to 6°C)  |
| Storage conditions:              | 12 months in original container    |
| Housing material:                | PPO                                |
| Weight:                          | < 0.7g                             |
| Sensor dimensions:               | 12.5mm x 11.5mm x 9mm              |
| Warranty Period:                 | 12 months from date of manufacture |
| Part Number:                     | 2112B012780                        |

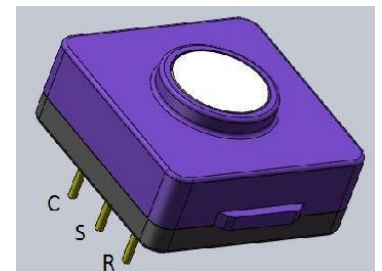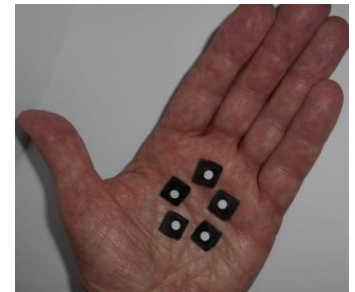

## DIMENSIONS

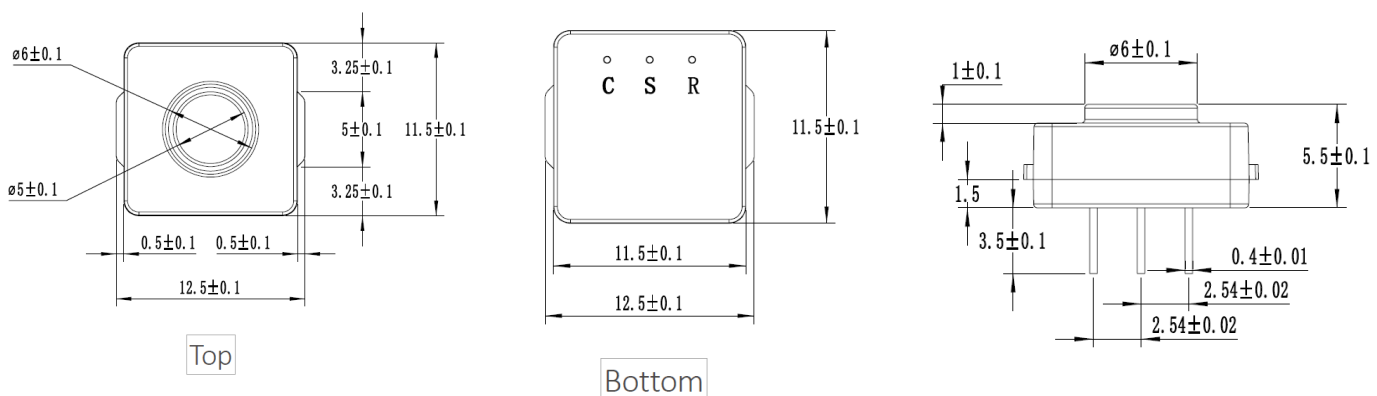


All dimensions are in mm. Tolerances are +/- 0.10mm unless otherwise stated.



# MICRO SS SENSOR 2000PPM SOLID STATE MULTI-GAS / VOC

## TEMPERATURE CURVE

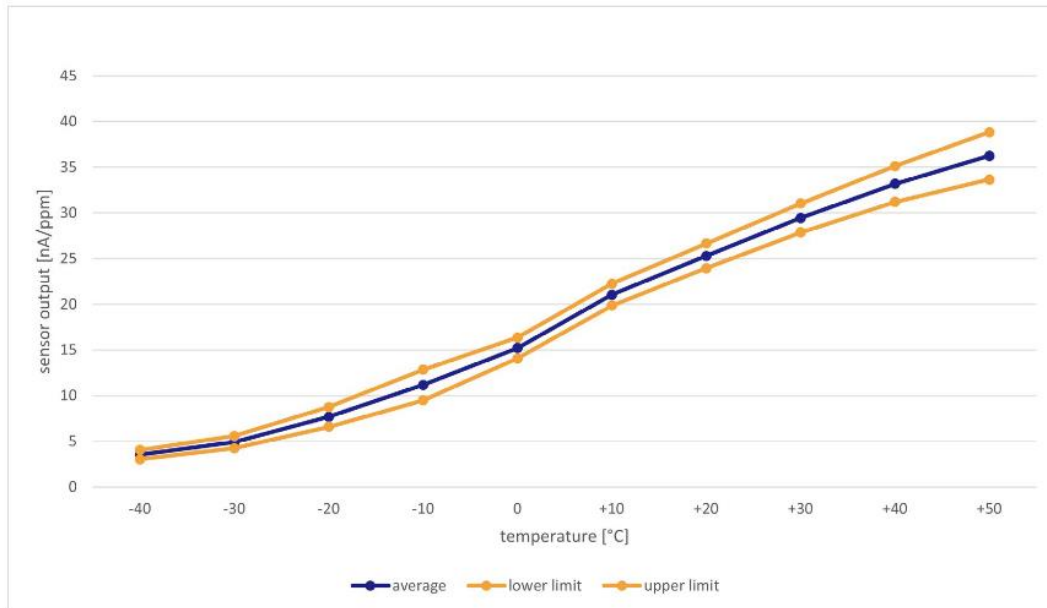

## ACCESSORIES



**Precision SIP terminals**  
for sensor pin connection,  
part no. 2112B4503330



**Test and calibration  
gas flow cap**, part no.  
2112B013701



**SS Micro TX**  
UART or i2c miniature  
precalibrated pluggable  
transmitter, part no.  
2112B0127802000



**SS PCB**  
Voltage and i2c miniature precalibrated  
pluggable transmitter, with onboard  
temperature measurement and life test  
capability, part no. 2112B019900



# MICRO SS SENSOR 2000PPM SOLID STATE MULTI-GAS / VOC

## CROSS SENSITIVITY DATA

| GAS   | CALCULATED TEST CONCENTRATION | TEST CONCENTRATION | READING IN PPM            |
|---|-------------------------------|--------------------|---------------------------|
| Ammonia NH <sub>3</sub>   | 20ppm                         | 1ppm               | 0ppm                      |
| Arsine ASH <sub>3</sub>   | 10ppm                         | 1ppm               | 4ppm                      |
| Benzene C <sub>6</sub> H <sub>6</sub>                           | -                             | 1ppm               | Not expected              |
| Bromine Br  | -                             | 1ppm               | Negative reading expected |
| Carbon Dioxide CO <sub>2</sub>                                  | -                             | 10% vol            | 0% vol                    |
| Carbon Monoxide CO  | 100ppm                        | 100ppm             | 100ppm                    |
| Chlorine Cl <sub>2</sub>  | -                             | 1ppm               | Negative reading expected |
| Chlorine Dioxide ClO <sub>2</sub>                               | -                             | 1ppm               | Negative reading expected |
| Dichloromethane CH <sub>2</sub> Cl <sub>2</sub>                 | -                             | 1ppm               | Negative reading expected |
| Diborane B <sub>2</sub> H <sub>6</sub>                          | -                             | 1ppm               | Positive reading expected |
| Dimethyl Disulfide C <sub>2</sub> H <sub>6</sub> S <sub>2</sub> | -                             | 1ppm               | Positive reading expected |
| Ethanol (Alcohols) C <sub>2</sub> H <sub>6</sub> O              | 500ppm                        | 1ppm               | 0.48ppm                   |
| Ethylene C <sub>2</sub> H <sub>4</sub>                          | 10ppm                         | 1ppm               | 0ppm                      |
| Ethylene Oxide C <sub>2</sub> H <sub>4</sub> O                  | 10ppm                         | 1ppm               | 0ppm                      |
| Fluorine F <sub>2</sub>   | -                             | 1ppm               | Negative reading expected |
| Formaldehyde HCHO   | -                             | 1ppm               | Positive reading expected |
| Gasoline Volatilisation   | -                             | 1ppm               | Positive reading expected |
| Germane GeH <sub>4</sub>  | -                             | 1ppm               | Positive reading expected |
| Hydrazine N <sub>2</sub> H <sub>4</sub>                         | -                             | 1ppm               | Positive reading expected |
| Hydrocarbons unsaturated  | -                             | 1ppm               | Not expected              |
| Hydrogen H <sub>2</sub>   | 500ppm                        | 2000ppm            | 609.5ppm                  |
| Hydrogen Bromide HBr  | -                             | 1ppm               | Negative reading expected |
| Hydrogen Chloride HCl   | -                             | 1ppm               | Negative reading expected |
| Hydrogen Cyanide HCN  | 10ppm                         | 1ppm               | 0.75ppm                   |
| Hydrogen Fluoride HF  | -                             | 1ppm               | Negative reading expected |
| Iodine I  | -                             | 1ppm               | Negative reading expected |
| Isopropanol C <sub>3</sub> H <sub>8</sub> O                     | -                             | 1ppm               | Positive reading expected |
| Methane CH <sub>4</sub>   | -                             | 1% vol             | 0% vol                    |
| Methanol CH <sub>3</sub> OH                                     | -                             | 1ppm               | Positive reading expected |



**EURO-GAS MANAGEMENT SERVICES LTD, CHURSTON HOUSE,  
BASCOMBE ROAD, CHURSTON FERRERS, DEVON, TQ5 0JJ, UK**

**☎: +44 (0)1803 844414**

**sales@euro-gasman.com**

**www.euro-gasman.com**

**EURO-GAS**  
MANAGEMENT SERVICES LTD

# MICRO SS SENSOR 2000PPM SOLID STATE MULTI-GAS / VOC

## CROSS SENSITIVITY DATA (continued)


| GAS  | CALCULATED TEST CONCENTRATION | TEST CONCENTRATION | READING IN PPM            |
|--|-------------------------------|--------------------|---------------------------|
| Nitric Oxide NO                                | -                             | 5ppm               | Positive reading expected |
| Nitrogen Dioxide NO <sub>2</sub>               | 10ppm                         | 1ppm               | -1.2ppm                   |
| Ozone O <sub>3</sub>                           | 0.755ppm                      | 1ppm               | -0.5ppm                   |
| Phosphine PH <sub>3</sub>                      | 5ppm                          | 1ppm               | 3.9ppm                    |
| Silane SiH <sub>4</sub>                        | -                             | 1ppm               | Positive reading expected |
| Sulphur Dioxide SO <sub>2</sub>                | 10ppm                         | 1ppm               | 0.6ppm                    |
| Tetrahydrothiophene THT                        | -                             | 1ppm               | Positive reading expected |
| Trimethylamine C <sub>3</sub> H <sub>9</sub> N | -                             | 1ppm               | Positive reading expected |

Sensor performance is temperature dependent. All performance specifications are based on test conditions with new sensors with the following environment conditions: +25°C, 50% relative humidity, 1 atm (1013 mBar or ambient pressure), flow rate > 150qcm/min. Cross-sensitivity gases are not target gases. Relationship can change overtime.

Whilst the SS sensor is designed to be highly specific to the gas it is intended to measure, it will still respond to some degree to various gases. The table is not exclusive and other gases not included in the table may still cause a sensor to react.

The cross-sensitivity values quoted are based on tests conducted on a small number of sensors. They are intended to indicate sensor response to gases other than the target gas. Sensors may behave differently with changes in ambient conditions and any batch may show significant variation from the values quoted.

The figures in this table are typical values and should not be used as a basis for cross calibration. Cross sensitivities may not be linear and should not be scaled. For some cross interference, break through will occur if gas is applied for a longer time period.

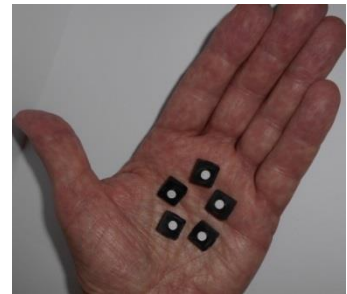

**Notes:** PCB sockets are recommended for the sensor pin connection. Soldering or using glue with the sensor should be avoided and will invalidate warranty. Socket connector information available on request. Sensors are designed to operate in a wide range of harsh environments and conditions. However, it is important to avoid exposure to high concentrations of solvent during storage, fitting into instrumentation and operation. When using sensors on PCBs, degreasing agents should be used prior to the sensor being fitted.

By the nature of the technology used, any sensor can potentially fail to meet specification without warning. Euro-Gas makes every effort to ensure reliability of all sensors but where life safety is a performance requirement of the product and, where practical, Euro-Gas recommends that all gas sensors and instruments using sensors are checked for response to gas before use. The data contained in this document is believed to be accurate and reliable. The data given is for guidance only. Euro-Gas Management Services Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this datasheet or the information contained in it. Customers should test the sensors under their own conditions to ensure that the sensors are suitable for their own requirements and in accordance with the plans and circumstances of the specific project and any standards/regulations pertaining to the country in which the sensors will be utilised. Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time. This datasheet is not intended to form the basis of a contract and in the interest of product improvement, Euro-Gas reserves the right to alter design features and specifications without notice. 2504

